


	P N/mm ²	K HB	N N/mm ²
105300	<1200	<300	Hliník <600 Plasty
vc = m/min.			
105300	10-45	15-25	150-200 110-130



Provedení:

S ochranným zahloubením 120°.

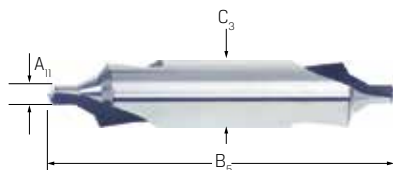

Č. výr.	105300 s ochranným zahloubením (RG 1021)	A11 mm	B5 mm	C3 mm	f mm/ot
1,00	●	1	35	4	0,006-0,012
1,60	●	1,6	45	6,3	0,006-0,012
2,00	●	2	50	8	0,020-0,032
2,50	●	2,5	56	10	0,025-0,040
3,15	●	3,15	60	11,2	0,032-0,050
4,00	●	4	67	14	0,040-0,063
5,00	●	5	75	18	0,040-0,063
6,30	●	6,3	80	20	0,050-0,080

	P N/mm ²	K HB	N N/mm ²
105500	<1200	<300	Hliník <600 Plasty
vc = m/min.			
105500	10-45	15-25	150-200 110-130




Provedení:

S plochou na stopce, posunutou o 15° vzhledem k zapuštěnému břítu.


Použití:

Pro použití na středících a zkracovacích strojích, které kromě centrování zároveň provádějí čelní soustružení čelní plochy obrobku.

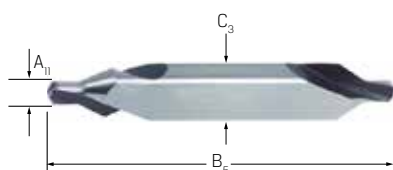



Č. výr.	105500 splochu (RG 1021)	A11 mm	B5 mm	C3 mm	f mm/ot
2,00	●	2	40	5	0,020-0,032
2,50	●	2,5	45	6,3	0,025-0,040
3,15	●	3,15	50	8	0,032-0,050
4,00	●	4	55	10	0,040-0,063
5,00	●	5	63	12,5	0,040-0,063
6,30	●	6,3	71	16	0,050-0,080

	P N/mm ²	K HB	N N/mm ²
105550	<1200	<300	Hliník <600 Plasty
vc = m/min.			
105550	10-45	15-25	150-200 110-130

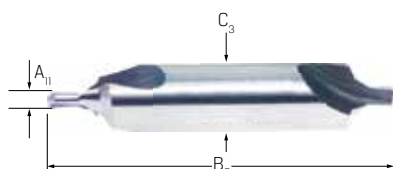

Č. výr.	105550 s ochranným zahloubením a plochou (RG 1022)	A11 mm	B5 mm	C3 mm	S mm	f mm/ot
1,60	●	1,6	45	6,3	5,35	0,006-0,012
2,00	●	2	50	8	6,95	0,020-0,032
2,50	●	2,5	55	10	6,4	0,025-0,040
3,15	●	3,15	63	11,2	10	0,032-0,050
4,00	●	4	69	14	12,65	0,040-0,063
5,00	○	5	87	18	16,4	0,040-0,063
6,30	○	6,3	80	20	17,9	0,050-0,080

	P N/mm ²	K HB	N N/mm ²
105600	<1200	<300	Hliník <600 Plasty
vc = m/min.			
105600	10-45	15-25	150-200 110-130

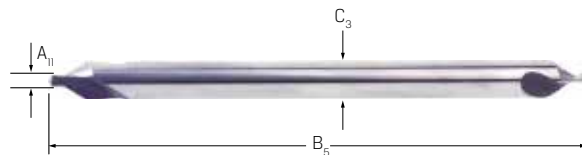

Č. výr.	105600 dlouhý (RG 1014)	A11 mm	B5 mm	C3 mm	f mm/ot
1,00	●	1	120	4	0,006-0,012
1,60	●	1,6	120	5	0,006-0,012
2,00	●	2	120	6	0,020-0,032
2,50	●	2,5	120	8	0,025-0,040
3,15	●	3,15	120	10	0,032-0,050

Č. výr.	105602 velmi dlouhý (RG 1014)	A11 mm	B5 mm	C3 mm	f mm/ot
1,00	●	1	150	4	0,006-0,012
1,50	●	1,5	150	5	0,006-0,012
2,00	●	2	150	6	0,020-0,032
2,50	●	2,5	150	8	0,025-0,040
3,00	●	3	150	8	0,025-0,040
4,00	●	4	150	10	0,040-0,063

Č. výr.	105604 extra dlouhý (RG 1014)	A11 mm	B5 mm	C3 mm	f mm/ot
2,00	●	2	200	5	0,020-0,032
2,50	○	2,5	200	6,3	0,025-0,040
3,15	●	3,15	200	8	0,032-0,050