


## Vysoce výkonný výstružník HNC

### Provedení:

- Vnitřní přívod chladiva
- Patentovaná rotačně broušená fazetka
- Povrchová vrstva BPK
- Pro průchodové nebo slepé otvory

### Výrobní tolerance:

celé a poloviční prům. = toleranční pole H7 dle DIN 1420  
Setinové prům. = 0,005/0

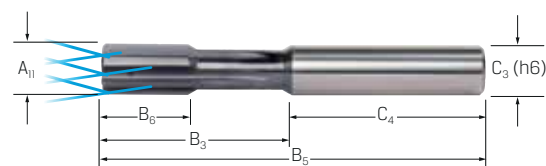

Č. vyr.	126400 Typ DL/SL (RG 1271)	A11 mm	B3 mm	B5 mm	B6 mm	C3 mm	C4 mm	Z DL/SL
3,97	104,90	3,97	22	50	12	4	28	4/4
3,98	104,90	3,98	22	50	12	4	28	4/4
3,99	104,90	3,99	22	50	12	4	28	4/4
4,00	96,20	4	22	50	12	4	28	4/4
4,01	104,90	4,01	22	50	12	4	28	4/4
4,02	104,90	4,02	22	50	12	4	28	4/4
4,03	104,90	4,03	22	50	12	4	28	4/4
4,50	129,40	4,5	22	50	12	4	28	4/4
4,97	107,70	4,97	22	50	12	4	28	4/4
4,98	107,70	4,98	22	50	12	4	28	4/4
4,99	107,70	4,99	22	50	12	4	28	4/4
5,00	99,10	5	22	50	12	4	28	4/4
5,01	107,70	5,01	22	50	12	4	28	4/4
5,02	107,70	5,02	22	50	12	4	28	4/4
5,03	107,70	5,03	22	50	12	4	28	4/4
5,50	139,60	5,5	28	64	12	6	36	4/4
5,97	121,90	5,97	28	64	12	6	36	6/6
5,98	121,90	5,98	28	64	12	6	36	6/6
5,99	121,90	5,99	28	64	12	6	36	6/6
6,00	112,50	6	28	64	12	6	36	6/6
6,01	121,90	6,01	28	64	12	6	36	6/6
6,02	121,90	6,02	28	64	12	6	36	6/6
6,03	121,90	6,03	28	64	12	6	36	6/6
6,50	142,80	6,5	34	70	16	6	36	6/6
7,00	117,00	7	34	70	16	6	36	6/6
7,50	151,60	7,5	34	70	16	6	36	6/6
7,97	132,50	7,97	39	75	16	8	36	6/6
7,98	132,50	7,98	39	75	16	8	36	6/6
7,99	132,50	7,99	39	75	16	8	36	6/6
8,00	122,70	8	39	75	16	8	36	6/6
8,01	132,50	8,01	39	75	16	8	36	6/6

Č. vyr.	126400 Typ DL/SL (RG 1271)	A11 mm	B3 mm	B5 mm	B6 mm	C3 mm	C4 mm	Z DL/SL
8,02	132,50	8,02	39	75	16	8	36	6/6
8,03	132,50	8,03	39	75	16	8	36	6/6
8,50	173,10	8,5	39	75	20	8	36	6/6
9,00	139,90	9	44	80	20	8	36	6/6
9,50	197,20	9,5	44	80	20	8	36	6/6
9,97	174,00	9,97	40	80	20	10	40	6/6
9,98	174,00	9,98	40	80	20	10	40	6/6
9,99	174,00	9,99	40	80	20	10	40	6/6
10,00	162,50	10	40	80	20	10	40	6/6
10,01	174,00	10,01	40	80	20	10	40	6/6
10,02	174,00	10,02	40	80	20	10	40	6/6
10,03	174,00	10,03	40	80	20	10	40	6/6
10,50	238,60	10,5	40	80	20	10	40	6/6
11,00	194,10	11	45	85	20	10	40	6/6
11,50	249,40	11,5	45	85	20	10	40	6/6
11,97	217,90	11,97	45	90	20	12	45	6/6
11,98	217,90	11,98	45	90	20	12	45	6/6
11,99	217,90	11,99	45	90	20	12	45	6/6
12,00	205,90	12	45	90	20	12	45	6/6
12,01	217,90	12,01	45	90	20	12	45	6/6
12,02	217,90	12,02	45	90	20	12	45	6/6
12,03	217,90	12,03	45	90	20	12	45	6/6
13,00	233,70	13	45	90	22	12	45	6/6
14,00	249,20	14	50	95	22	14	45	6/6
15,00	254,80	15	55	100	22	14	45	6/6
16,00	273,00	16	57	105	25	16	48	6/6
17,00	291,90	17	62	110	25	16	48	6/6
18,00	311,40	18	62	110	25	18	48	6/6
19,00	334,30	19	62	110	25	18	48	6/6
20,00	356,00	20	65	115	25	20	50	6/6

