



	K HB	Provedení a použití:
137280	(300)	- Pro průchozí závit
137310		- Tvar náběhu C, 2-3 otáčky
		- HSS ocel s podílem kobaltu
		- Povlakováno TiCN
		- Pro lité materiály
vc = m/min.		
137280	15-20	
137310		

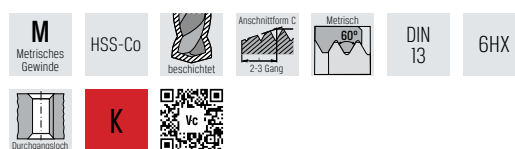


Č. výr.	137280 metrický, HSS-Co, TiCN (RG 1304)	137310 metrický, HSS-Co, TiCN (RG 1304)	A21 metrický	Stoupání závitů mm	B1 mm	B2 mm	B3 mm	C3 mm	C4 mm	a mm	Jádro prům. mm
M4	17,60	—	M4	0,7	13	21	63	4,5	6	3,4	3,3
M5	17,60	—	M5	0,8	16	25	70	6	8	4,9	4,2
M6	17,85	14,00	M6	1	19	30	80	6	8	4,9	5
M8	28,40	15,60	M8	1,25	22	35	90	8	9	6,2	6,8
M10	27,25	18,65	M10	1,5	24	39	100	10	11	8	8,5
M12	—	20,35	M12	1,75	23	—	110	9	10	7	10,2
M14	—	24,50	M14	2	25	—	110	11	12	9	12
M16	—	26,55	M16	2	25	—	110	12	12	9	14
M18	—	38,35	M18	2,5	30	—	125	14	14	11	15,5
M20	—	41,75	M20	2,5	30	—	140	16	15	12	17,5
M22	—	75,10	M22	2,5	30	—	140	18	17	14,5	19,5
M24	—	65,85	M24	3	36	—	160	18	17	14,5	21
M27	—	87,75	M27	3	36	—	160	20	19	16	24
M30	—	104,40	M30	3,5	42	—	180	22	21	18	26,5

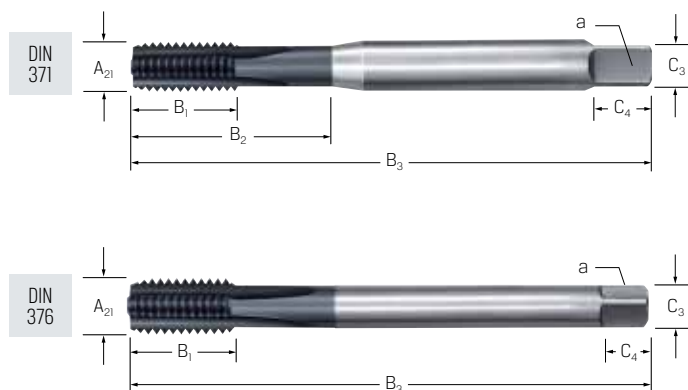

	K HB
137410	(300)
vc = m/min.	
137410	15-20

Provedení a použití:

- Pro průchozí závit
- Tvar náběhu C, 2-3 otáčky
- HSS ocel s podílem kobaltu
- Povlakováno TiCN
- Pro lité materiály

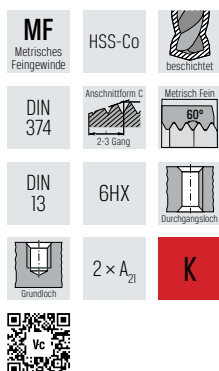


Č. výr.	137410 metrický- jemný, HSS-Co, TiCN (RG 1304)	A21 metrický	Stoupání závitů mm	B1 mm	B3 mm	C3 mm	C4 mm	a mm	Jádro prům. mm
M3x0,35	15,60	M3	0,35	10	56	2,5	—	—	2,65
M4x0,5	15,40	M4	0,5	12	63	2,8	5	2,1	3,5
M5x0,5	17,40	M5	0,5	13	70	3,5	6	2,7	4,5
M6x0,5	18,00	M6	0,5	15	80	4,5	6	3,4	5,5
M6x0,75	17,75	M6	0,75	15	80	4,5	6	3,4	5,2
M8x0,75	20,35	M8	0,75	15	80	6	8	4,9	7,2
M8x1	20,55	M8	1	18	90	6	8	4,9	7
M10x1	20,95	M10	1	20	90	7	8	5,5	9
M12x1	24,60	M12	1	21	100	9	10	7	11
M12x1,5	23,90	M12	1,5	21	100	9	10	7	10,5
M14x1,5	30,60	M14	1,5	21	100	11	12	9	12,5
M16x1,5	35,25	M16	1,5	21	100	12	12	9	14,5
M18x1,5	41,90	M18	1,5	24	110	14	14	11	16,5
M20x1,5	49,90	M20	1,5	24	125	16	15	12	18,5
M22x1,5	51,15	M22	1,5	24	125	18	17	14,5	20,5

	K HB
137510	(300)
vc = m/min.	
137510	15-20

Provedení a použití:

- Pro průchozí závit
- Tvar náběhu C, 2-3 otáčky
- HSS ocel s podílem kobaltu
- Povlakováno TiCN
- Pro lité materiály



Č. výr.	137510 G(WWR), HSS-Co, TiCN (RG 1304)	A22 Palcový	Počet otáček na palec	A22 mm	B1 mm	B3 mm	C3 mm	C4 mm	a mm	Jádro prům. mm
1/8 - 28	30,65	G 1/8	28	9,73	20	90	7	8	5,5	8,8
1/4 - 19	40,75	G 1/4	19	13,16	21	100	11	12	9	11,8
3/8 - 19	50,50	G 3/8	19	16,66	21	100	12	12	9	15,25
1/2 - 14	77,15	G 1/2	14	20,95	24	125	16	15	12	19
5/8 - 14	86,30	G 5/8	14	22,91	24	125	18	17	14,5	21
3/4 - 14	107,00	G 3/4	14	26,44	26	140	20	19	16	24,5
1 - 11	278,00	G 1	11	33,25	28	140	25	23	20	30,75