


► Vysoce výkonná úhlová fréza VHM

PREMUS®

	P N/mm ²
178516	<900
vc = m/min.	
178516	60-105

Provedení:

- Tvar C, 45 stupňů
- Univerzální využití
- Sražená špička
- fz mm/zub = 0,033-0,045

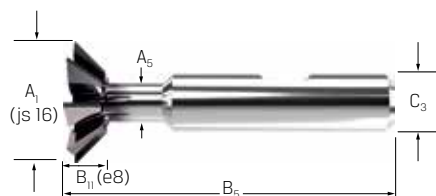


Č. výr.	178516 Fazetka, TiAlN (RG 1755)	A1 mm	A5 mm	B5 mm	B11 mm	C3 mm	Z
12	362,00	12	5	55	3	10	6
16	395,40	16	6,7	60	4	10	6
20	453,00	20	7	63	5	12	8
22	508,00	22	8	67	6	12	8
25	555,70	25	8	67	6,3	12	8
28	655,90	28	8,5	80	7,5	16	9
32	753,10	32	13	71	8	16	9
38	855,80	38	15	80	10	16	9

	P N/mm ²
178520	<900
vc = m/min.	
178520	60-105

Provedení:

- Tvar C, 60 stupňů
- Univerzální využití
- Sražená špička
- fz mm/zub = 0,033-0,045

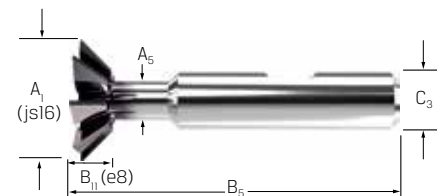


Č. výr.	178520 Fazetka, TiAlN (RG 1755)	A1 mm	A5 mm	B5 mm	B11 mm	C3 mm	Z
12	345,30	12	5	55	5	10	6
16	379,30	16	6	60	6,3	10	6
20	430,70	20	7,8	63	8	12	8
22	488,20	22	10	67	9	12	8
25	532,10	25	9	67	10	12	8
28	628,00	28	13	80	11	16	9
32	716,60	32	15	71	12,5	16	9
38	818,00	38	15	80	16	16	9

	P N/mm ²
178518	<900
vc = m/min.	
178518	60-105

Provedení:

- Tvar D, 45 stupňů
- Univerzální využití
- Sražená špička
- fz mm/zub = 0,033-0,045

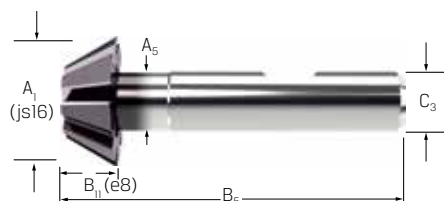


Č. výr.	178518 Fazetka, TiAlN (RG 1755)	A1 mm	A5 mm	B5 mm	B11 mm	C3 mm	Z
12	329,80	12	5	55	3	10	6
16	359,50	16	8	60	4	10	6
20	413,40	20	10	63	5	12	8
22	465,30	22	10,2	67	6	12	8
25	503,10	25	11	67	6,3	12	8
28	601,40	28	14	80	7,5	16	10
32	683,70	32	15	71	8	16	10
38	776,50	38	15	80	10	16	10

	P N/mm ²
178522	<900
vc = m/min.	
178522	60-105

Provedení:

- Tvar D, 60 stupňů
- Univerzální využití
- Sražená špička
- fz mm/zub = 0,033-0,045

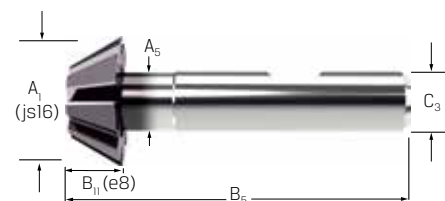

Č. výr.	178522 Fazetka, TiAlN (RG 1755)	A1 mm	A5 mm	B5 mm	B11 mm	C3 mm	Z
12	328,50	12	5	55	5	10	6
16	359,50	16	8,2	60	6,3	10	6
20	413,40	20	10,5	63	8	12	8
22	465,30	22	10,2	67	9	12	8
25	503,10	25	11,5	67	10	12	8
28	601,40	28	14	80	11	16	10
32	678,20	32	15	71	12,5	16	10
38	776,50	38	15	80	16	16	10