


Provedení:

- Radiální
- Kulová střikací tryska

Dodávka:

Včetně namontované podložky.

DIN
69880

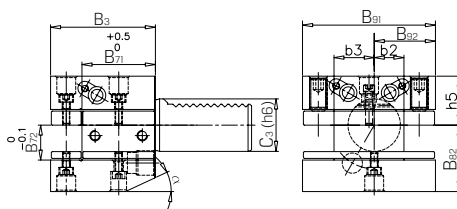

D1




D2

Č. výr.	233700 Tvar D1 (RG 2300)	233750 Tvar D2 (RG 2300)	C3 mm	B71 mm	B3 mm	B72 mm	B82 mm	B91 mm	B92 mm	h5 mm	b3 mm
D125×16×48	230,70	—	25	34	48	16	30	66	33	25	19
D225×16×48	—	230,70	25	34	48	40	30	66	33	25	19
D130×20×60	206,40	—	30	42	60	20	28	76	35	38	23
D230×20×60	—	206,40	30	42	60	20	38	76	35	35	23
D140×25×72	228,70	—	40	50	72	205	32,5	90	42,5	48	25,5
D240×25×72	—	233,90	40	50	72	25	48	90	42,5	42,5	25,5
D150×32×85	290,30	—	50	60	85	32	60	105	50	35	30,5
D250×32×85	—	290,30	50	60	85	32	60	105	50	50	30,5
D160×32×110	387,10	—	60	85	110	32	42,5	115	57,5	62,5	33
D260×32×110	—	387,10	60	85	110	32	62,5	115	57,5	62,5	33

Č. výr.	233800 Tvar Z2 S zoceli (RG 2301)	C3 mm	A1 mm	B1 mm	B82 mm	C4 mm
Z216S	30,65	16	40	13	18	45
Z220S	30,65	20	50	16	23	56
Z225S	33,10	25	58	16	25	64
Z230S	29,00	30	68	16	28	71
Z240S	34,50	40	83	20	32,5	83
Z250S	39,55	50	98	20	35	98
Z260S	56,60	60	123	20	42,5	114

Č. výr.	233850 Tvar Z2 P z plastu (RG 2301)	C3 mm	A1 mm	B1 mm	B82 mm	C4 mm
Z216P	34,45	16	40	13	18	45
Z220P	14,05	20	50	16	23	56
Z230P	12,10	30	68	16	28	71
Z240P	14,05	40	83	20	32,5	83
Z250P	23,45	50	98	20	35	98
Z260P	27,60	60	123	20	42,5	114

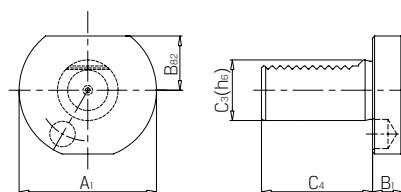


Z2

Provedení:

Čtyřhranné polotovary pro speciální provedení tvaru A1
Stopka a styčná plocha jsou kalené a broušené

Č. výr.	233900 (RG 2300)	C3 mm	B3 mm	B81 mm	B91 mm
A116×44	83,90	16	44	44	78
A120×65	90,35	20	65	60	100
A125×75	137,00	25	75	60	100
A130×85	137,00	30	85	76	130
A140×100	209,70	40	100	96	151
A150×125	282,30	50	125	120	160
A160×160	387,10	60	160	125	165

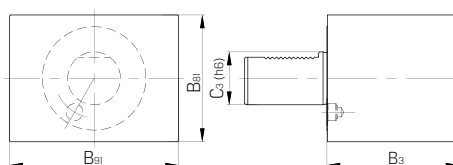


A1

Provedení:

Válcový polotovar pro speciální provedení tvaru A2
Stopka a styčná plocha jsou kalené a broušené

Č. výr.	233950 (RG 2300)	C3 mm	A1 mm	B3 mm
A216×60	61,30	16	40	60
A220×70	58,10	20	50	70
A225×80	75,80	25	58	80
A225×200	96,80	25	58	200
A230×100	75,80	30	68	100
A230×240	122,60	30	68	240
A240×120	79,00	40	83	120
A240×320	164,50	40	83	320
A250×135	108,10	50	98	135
A250×400	306,40	50	98	400
A260×150	193,60	60	123	150
A260×480	483,90 +	60	123	480

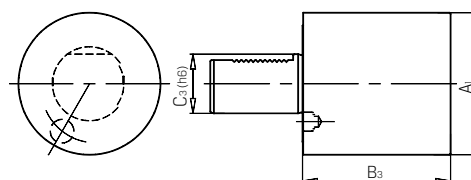

A2

DIN
69880

DIN
69880