

Držák nástrojů DIN 69880



Držáky nástrojů pro vrtáky s vyměnitelnými destičkami tvaru E1, s vnitřním přívodem chladiva přes nákrůžek a s broušenou dosedací plochou

Upozornění:

Skvěle se hodí pro všechny vrtací nástroje se stopkou Whistle Notch.

PRETEC®

DIN
69880

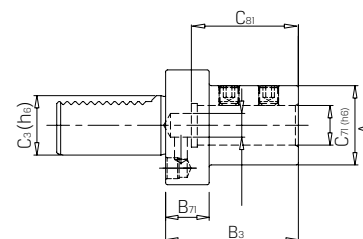

Č. výr.	234100 Tvar E1 (RG 2300)	C3 mm	A1 mm	A4 mm	B3 mm	B71 mm	B82 mm	C71 mm	C81 mm
E120×16	87,35	20	36	50	64	18	—	16	51
E120×20	87,35	20	40	50	64	18	—	20	51
E120×25	87,35	20	45	50	71	18	—	25	59
E125×16	89,40	25	40	58	67	18	25	16	54
E125×20	89,40	25	40	58	67	18	25	20	54
E125×25	89,40	25	45	58	71	18	25	25	59
E125×32	93,35	25	52	58	75	18	25	32	63
E130×06	87,10	30	25	68	50	22	28	6	36
E130×08	87,10	30	28	68	50	22	28	8	36
E130×10	87,10	30	35	68	54	22	28	10	40
E130×12	87,10	30	42	68	59	22	28	12	45
E130×14	87,10	30	—	68	22	22	28	14	—
E130×16	79,00	30	36	68	64	22	28	16	51
E130×20	79,00	30	40	68	67	22	28	20	54
E130×25	79,00	30	45	68	71	22	28	25	59
E130×32	79,00	30	52	68	75	22	28	32	63
E140×06	95,15	40	25	83	50	22	32,5	6	36
E140×08	95,15	40	28	83	50	22	32,5	8	36
E140×10	101,60	40	35	83	54	22	32,5	10	40
E140×12	101,60	40	42	83	58	22	32,5	12	45

Č. výr.	234100 Tvar E1 (RG 2300)	C3 mm	A1 mm	A4 mm	B3 mm	B71 mm	B82 mm	C71 mm	C81 mm
E140×14	95,15	40	—	83	22	22	32,5	14	—
E140×16	100,90	40	36	83	64	22	32,5	16	51
E140×20	100,90	40	40	83	67	22	32,5	20	54
E140×25	96,30	40	45	83	75	22	32,5	25	59
E140×32	96,30	40	52	83	75	22	32,5	32	63
E140×40	96,30	40	65	83	90	22	32,5	40	73
E140×50	103,20	40	70	83	100	22	32,5	50	83
E150×16	116,20	50	36	98	64	30	35	16	51
E150×20	116,20	50	40	98	67	30	35	20	54
E150×25	116,20	50	45	98	80	30	35	25	59
E150×32	116,20	50	52	98	80	30	35	32	63
E150×40	116,20	50	65	98	90	30	35	40	73
E150×50	116,20	50	75	98	100	30	35	50	83
E160×16	177,50	60	36	123	64	30	42,5	16	51
E160×20	177,50	60	40	123	80	30	42,5	20	54
E160×25	169,40	60	45	123	80	30	42,5	25	59
E160×32	169,40	60	52	123	80	30	42,5	32	63
E160×40	169,40	60	65	123	90	30	42,5	40	73
E160×50	169,40	60	75	123	100	30	42,5	50	83




E1


Provedení:

- Vnitřní chlazení lze nastavovat prostřednictvím stavěcího šroubu na nákrůžku
- Nastavení délky u provrtané stopky je možné ze strany stopky (typ A)
- Uzavírací šroub je proti pádu do revolveru zajištěn pojistným kroužkem
- U typu A není nutné zkracování vrtné tyče

*Upnutí nástrojů se vrtá hlouběji

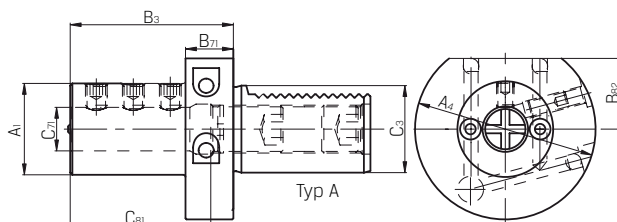

Typ A



Typ B



E2

Č. výr.	234200 Tvar E2 s vnitřním chlazením (RG 2300)	*	Typ	C3 mm	A1 mm	A4 mm	B3 mm	B71 mm	B82 mm	C71 mm	C81 mm
E216×6	84,30		B	16	32	40	44	13	18	6	34
E216×8	84,30		B	16	32	40	44	13	18	8	34
E216×10	84,30		B	16	32	40	44	13	18	10	34
E216×12	84,30		B	16	40	40	44	18	12	12	34
E216×16	84,30		B	16	40	40	44	18	16	16	34
E220×6	91,85		B	20	40	50	50	18	23	6	42
E220×8	84,30	*	B	20	40	50	50	18	23	8	42
E220×10	84,30	*	B	20	40	50	50	18	23	10	42
E220×12	84,30		B	20	40	50	50	18	23	12	42
E220×16	84,30		B	20	40	50	50	18	23	16	42
E220×20	84,30		B	20	49	50	50	18	23	20	42
E220×25	84,30		B	20	49	50	60	18	23	25	52
E225×8	84,30	*	A	25	40	58	50	18	25	8	41
E225×10	84,30	*	A	25	40	58	50	18	25	10	41
E225×12	84,30	*	A	25	40	58	50	18	25	12	41
E225×16	84,30		B	25	40	58	50	18	25	16	41
E225×20	84,30		B	25	58	58	50	50	25	20	41
E225×25	84,30		B	25	58	58	60	60	25	25	51
E230×6	80,15		A	30	55	68	60	22	28	6	43
E230×8	80,15	*	A	30	55	68	60	22	28	8	43
E230×10	80,15	*	A	30	55	68	60	22	28	10	43
E230×12	80,15	*	A	30	55	68	60	22	28	12	43
E230×16	80,15	*	A	30	55	68	60	22	28	16	54
E230×20	80,15		B	30	55	68	60	22	28	20	51
E230×25	80,15		B	30	55	68	60	22	28	25	51
E230×30	93,35		B	30	67	68	75	22	28	30	61

Č. výr.	234200 Tvar E2 s vnitřním chlazením (RG 2300)	*	Typ	C3 mm	A1 mm	A4 mm	B3 mm	B71 mm	B82 mm	C71 mm	C81 mm
E230×32	80,15		B	30	67	68	75	22	28	32	61
E230×40	80,15		B	30	67	68	90	22	28	40	76
E240×6	87,35		A	40	55	83	75	22	32,5	6	43
E240×8	87,35	*	A	40	55	83	75	22	32,5	8	43
E240×10	87,35	*	A	40	55	83	75	22	32,5	10	43
E240×12	87,35	*	A	40	55	83	75	22	32,5	12	58
E240×16	87,35	*	A	40	55	83	75	22	32,5	16	61
E240×20	87,35		A	40	55	83	75	22	32,5	20	61
E240×25	87,35		B	40	55	83	75	22	32,5	25	61
E240×30	97,80		B	40	82	83	75	22	32,5	30	61
E240×32	88,85		B	40	82	83	75	22	32,5	32	61
E240×40	97,80		B	40	82	83	90	22	32,5	40	76
E240×50	104,80		B	40	98	98	100	100	35	50	86
E250×12	119,40		A	50	68	98	90	30	35	12	71
E250×16	119,40		A	50	68	98	90	30	35	16	76
E250×20	119,40		A	50	68	98	90	30	35	20	76
E250×25	119,40		A	50	68	98	90	30	35	25	76
E250×32	119,40		B	50	68	98	90	30	35	32	76
E250×40	119,40		B	50	98	98	90	90	35	40	76
E250×50	120,20		B	50	98	98	100	100	35	50	86
E260×16	169,40		A	60	68	123	90	30	42,5	16	76
E260×20	169,40		A	60	68	123	90	30	42,5	20	76
E260×25	169,40		A	60	68	123	90	30	42,5	25	76
E260×32	169,40		A	60	68	123	90	30	42,5	32	76
E260×40	177,50		B	60	98	123	90	30	42,5	40	76
E260×50	183,90		B	60	98	123	100	30	42,5	50	86