


► Držák nástrojů DIN 69880

PRETEC®

Provedení:

- Pro nástroje se stopkou dle DIN 228B s vyvrážecem.
- Kulová střikací tryska

*bez ozubení

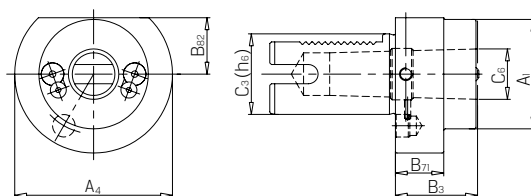

DIN 69880


Č. výr.	234300 Tvar F (RG 2300)	*	C6	C3 mm	A1 mm	A4 mm	B3 mm	B71 mm	B82 mm
F16MK1	104,80		MK1	16	—	40	50	—	—
F20MK1	104,80		MK1	20	—	50	23	—	—
F20MK2	104,80	*	MK2	20	—	50	61	22	—
F25MK1	104,80		MK1	25	—	58	—	—	25
F25MK2	143,60		MK2	25	—	58	27	—	25
F30MK1	93,55		MK1	30	—	68	27	—	28
F30MK2	93,55		MK2	30	—	68	36	—	27
F30MK3	93,55		MK3	30	55	68	66	41	28

Č. výr.	234300 Tvar F (RG 2300)	*	C6	C3 mm	A1 mm	A4 mm	B3 mm	B71 mm	B82 mm
F40MK1	101,60		MK1	40	55	83	36	22	32,5
F40MK2	101,60		MK2	40	55	83	36	22	32,5
F40MK3	101,60		MK3	40	58	83	36	22	32,5
F40MK4	112,90		MK4	40	68	83	80	22	32,5
F50MK2	130,60		MK2	50	55	98	36	30	35
F50MK3	127,40		MK3	50	58	98	36	30	35
F50MK4	130,60		MK4	50	68	98	50	30	35
F50MK5	177,50	*	MK5	50	—	98	16	—	35

Provedení:

- Kleštinové upnutí tvar E4
- Pro ER kleštiny dle DIN 6499, 248450-248659

DIN 69880

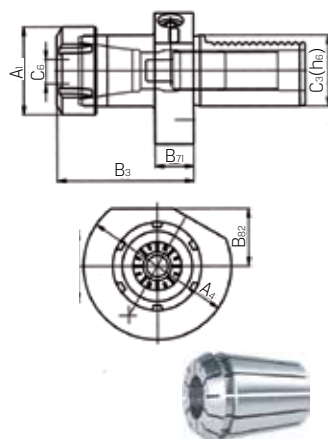


E4

Č. výr.	234550 Tvar E4 (RG 2300)	C6	C3 mm	A1 mm	A4 mm	B3 mm	B71 mm	B82 mm	Upínací rozsah mm
E416×16	124,20	ER16	16	32	40	38	13	18	1 - 10
E416×20	132,30	ER20	16	35	40	44	13	18	1 - 13
E416×25	120,90	ER25	16	42	40	44	13	18	2 - 16
E420×16	120,90	ER16	20	32	50	44	18	—	1 - 10
E420×20	120,90	ER20	20	35	50	44	18	—	1 - 13
E420×25	120,90	ER25	20	42	50	50	18	—	1 - 16
E420×32	120,90	ER32	20	50	50	62	18	—	2 - 20
E425×25	132,30	ER25	25	42	58	57	18	25	2 - 16
E425×32	135,50	ER32	25	50	58	62	18	25	2 - 20
E430×16	135,50	ER16	30	32	68	48	22	28	1 - 10
E430×25	135,50	ER25	30	42	68	57	22	28	2 - 16
E430×32	135,50	ER32	30	50	68	62	22	28	2 - 20
E430×40	135,50	ER40	30	63	68	70	22	28	3 - 30
E440×25	135,50	ER25	40	42	83	62	22	32,5	2 - 16
E440×32	135,50	ER32	40	50	83	62	22	32,5	2 - 20
E440×40	135,50	ER40	40	63	83	75	22	32,5	2 - 30
E450×32	172,60	ER32	50	50	98	75	30	35	2 - 20
E450×40	172,60	ER40	50	63	98	75	30	35	2 - 30
E460×32	201,60	ER32	60	50	123	75	30	42,5	2 - 20
E460×40	214,60	ER40	60	63	123	75	30	42,5	2 - 30

Provedení:

- Výškově nastavitelné
- Kulová střikací tryska

DIN 69880

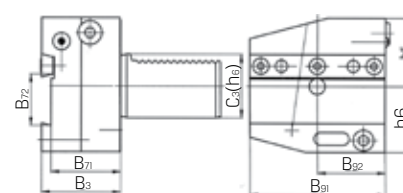

AR



AL

Č. výr.	234650 Tvar AR, pravý (RG 2300)	234660 Tvar AL, levý (RG 2300)	C3 mm	B3 mm	B71 mm	B72 mm	B91 mm	B92 mm	h ₅ mm	h ₆ mm
AR2026	435,40	—	20	50	44	26	60	30	28	36
AL2026	—	435,40	20	50	44	26	60	30	28	36
AR2526	419,30	—	25	50	44	26	60	30	28	36
AL2526	—	419,30	25	50	44	26	60	30	28	36
AR3026	395,10	—	30	50	44	26	70	35	32	39
AL3026	—	395,10	30	50	44	26	70	35	32	39
AR3032	451,70	—	30	50	44	32	70	35	32	39
AL3032	—	451,70	30	50	44	32	70	35	32	39
AR4026	443,50	—	40	50	44	26	85	42,5	43	41,5
AL4026	—	443,50	40	50	44	26	85	42,5	43	41,5
AR4032	443,50	—	40	50	44	32	85	42,5	43	41,5
AL4032	—	443,50	40	50	44	32	85	42,5	43	41,5
AR5026	467,80	—	50	50	44	26	100	50	43	45
AL5026	—	467,80	50	50	44	26	100	50	43	45
AR5032	467,80	—	50	50	44	32	100	50	43	45
AL5032	—	467,80	50	50	44	32	100	50	43	45
AR6032	629,00	—	60	50	44	32	125	62,5	48	55
AL6032	—	629,00	60	50	44	32	125	62,5	48	55


Použití:

- Chapač pro tažení tyčového materiálu směrem vpřed
- Typ Z je k dostání na dotaz

Č. výr.	234600 Tvar KH1 (RG 2300)	C3 mm	B1 mm	B3 mm	B71 mm	B81 mm	B91 mm	B92 mm	Upínací rozsah mm
KH1 - 30	1 002,00	30	46	51	4	72	50	28	10 - 75
KH1 - 40	1 108,00	40	48	53	4	110	60	28	10 - 75
KH1 - 50	1 421,00	50	67	73	5	130	65	28	10 - 75



KH1

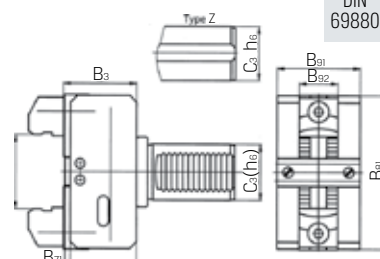

DIN 69880