


Dvojitý otevřený klíč

WGB
Das Werkzeug

Provedení:

- Ze speciální oceli (pevnost 1 200–1 400 N/mm²)
- Povrch je černý
- Zápustkové kované a brunované
- Robustní tvar

DIN
895



Č. výr.	500502 (RG 5003)	SW ₁ mm	SW ₂ mm	L mm	A mm
6×7	1,18	6	7	95	3,3
8×9	1,47	8	9	110	4
8×10	1,33	8	10	115	4,5
10×11	1,68	10	11	125	5
10×13	1,60	10	13	115	5,5
12×13	2,07	12	13	140	5,5
13×15	1,60	13	15	150	5,5
13×17	1,68	13	17	155	6
14×17	1,77	14	17	160	6
17×19	2,13	17	19	160	6,5

Č. výr.	500502 (RG 5003)	SW ₁ mm	SW ₂ mm	L mm	A mm
19×22	3,10	19	22	195	8
19×24	4,08	19	24	215	9
22×24	4,68	22	24	220	9
24×27	5,15	24	27	245	10
24×30	6,08	24	30	265	11
30×32	7,15	30	32	275	12
30×36	11,50	30	36	305	13
32×36	13,60	32	36	305	13
36×41	14,00	36	41	345	14
46×50	31,25	46	50	420	16

Jednoduchý otevřený klíč

WGB
Das Werkzeug

Provedení:

- Ze speciální oceli (pevnost 1 200–1 400 N/mm²)
- Povrch je černý
- Zápustkové kované a brunované
- Robustní tvar

DIN
894



Č. výr.	500602 (RG 5003)	SW ₁ mm	L mm	A mm
6	1,21	6	75	3
7	1,21	7	80	3,2
8	1,33	8	95	3,5
10	1,36	10	105	4,5
13	1,45	13	135	5,5
14	1,63	14	140	5,5
17	1,77	17	151	6
19	2,25	19	170	7
22	2,75	22	195	8
24	3,72	24	195	8

Č. výr.	500602 (RG 5003)	SW ₁ mm	L mm	A mm
27	4,27	27	215	9
30	5,38	30	240	10
32	6,29	32	260	11
36	8,45	36	275	12
41	11,30	41	305	13
46	15,55	46	340	14
50	18,65	50	380	15
55	24,00	55	440	17
60	34,40	60	477	18
65	52,10	65	510	19

Očkoplochý klíč


PROJAHN

Provedení:

- Chrom-vanadiová ocel
- Poniklované, chromované a matně satinované
- Hlavy leštěné do vysokého lesku
- Pozice vidlice 15°, zahnutá, strana s očkem je zahnutá o 15°
- Speciální profil oka s větší kontaktní plochou, uchopí šroub za jeho bok a chrání tak hrany

DIN
3113 A

ISO
3318

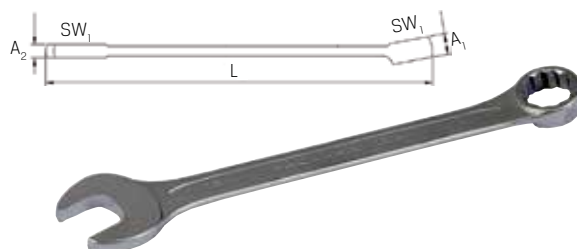

Č. výr.	501060 zahnutý (RG 5004)	SW ₁ mm	L mm	A ₁ mm	A ₂ mm
5,5	3,65	5,5	93	4	3,4
6	2,80	6	100	5	3,7
7	2,80	7	110	5	3,7
8	3,16	8	120	5,5	4,1
9	3,06	9	130	6	4,1
10	3,28	10	140	6,5	4,6
11	3,61	11	150	6,5	4,7
12	3,61	12	165	7	4,8
13	3,81	13	170	7,5	5,5
14	4,15	14	180	8	5,6

Č. výr.	501060 zahnutý (RG 5004)	SW ₁ mm	L mm	A ₁ mm	A ₂ mm
15	4,46	15	190	8,5	5,7
16	4,83	16	200	9	5,8
17	5,23	17	210	9,5	6,3
18	6,07	18	220	10	6,8
19	6,27	19	230	10,4	7,1
20	7,09	20	240	10,9	7,2
21	7,09	21	250	11,4	7,5
22	7,32	22	260	11,9	8
23	11,20	23	260	11,9	8
24	8,67	24	280	12,9	8,2

Č. výr.	501060 zahnutý (RG 5004)	SW ₁ mm	L mm	A ₁ mm	A ₂ mm
25	12,75	25	295	13,4	8,7
26	13,60	26	295	13,4	8,7
27	11,05	27	310	14,4	8,9
30	14,00	30	340	15,9	10
32	15,30	32	360	16,9	10,8
36	26,10	36	410	18,2	13
41	36,45	41	460	20	15,5
46	41,75	46	500	21	16,2
50	47,50	50	540	22,6	17,2



4408



4410

Č. výr.	501065 Sada zahnuté (RG 5004)	Dílý	Obsah
4408	64,35	14	8 10 11 12 13 14 15 16 17 18 19 20 21 22 mm
4410	138,70	23	6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 24 25 26 27 30 32 mm