


► Očkoplochý klíč dlouhý

Provedení:

- Chrom-vanadiová ocel
- Poniklované, chromované a matně satinované
- Strana s očkem je zahnutá o 15°
- Pozice vidlice 15°
- Speciální profil oka s větší kontaktní plochou, uchopí šroub za jeho bok a chrání tak hrany

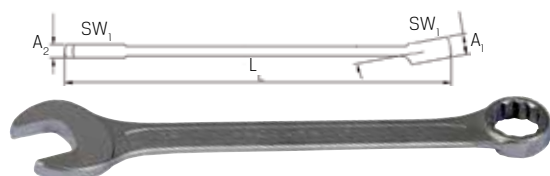

Č. výr.	501350 zahnutý (RG 5081)	SW ₁ mm	L mm	A ₁ mm	A ₂ mm	Č. výr.	501350 zahnutý (RG 5081)	SW ₁ mm	L mm	A ₁ mm	A ₂ mm
8	5,04	8	148	5,5	4,1	18	10,40	18	270	10	6,8
9	5,56	9	167	6	4,1	19	10,90	19	280	10,4	7,1
10	5,66	10	172	6,5	4,6	20	13,40	20	290	10,9	7,2
11	5,86	11	186	6,5	4,7	21	13,60	21	301	11,4	7,5
12	6,66	12	197	7	4,8	22	14,50	22	318	11,9	8
13	6,55	13	207	7,5	5,5	24	16,15	24	338	12,9	8,2
14	7,44	14	223	8	5,6	27	21,45	27	376	14,4	8,9
15	8,13	15	233	8,5	5,7	30	26,65	30	394	15,9	10
16	8,89	16	243	9	5,8	32	28,10	32	435	16,9	10,8
17	9,09	17	261	9,5	6,3						

PROJAHN

DIN
3113 A

ISO
3318

ISO
7738



4436



4438

Č. výr.	501355 Sada zahnuté (RG 5081)	Díly	Obsah
4436	61,10	8	8 10 12 13 16 17 18 19 mm
4438	121,00	14	8 10 11 12 13 14 15 16 17 18 19 20 21 22 mm

► Ráčnový očkoplochý klíč

Provedení:

- Chrom-vanadiová ocel
- Poniklované, chromované a leštěné do vysokého lesku
- Pozice vidlice 15°
- 72 zubů, úhel kroku zpětného chodu 5°



Č. výr.	501402 jemné ozubení (RG 5080)	SW ₁ mm	max. točivý moment Nm	Celková délka mm
6	11,05	6	27	135
7	11,20	7	33	135
8	11,20	8	43	140
9	11,05	9	57	140
10	11,20	10	86	155
11	12,30	11	98	170
12	12,30	12	112	170
13	12,40	13	143	180
14	14,10	14	191	185
15	14,10	15	250	200
16	14,75	16	264	215
17	15,00	17	319	230
18	15,95	18	359	240
19	16,85	19	385	250
21	26,75	21	435	280
22	28,30	22	506	285
24	30,35	24	630	325
27	40,05	27	699	360
30	44,35	30	837	425
32	47,55	32	987	425
34	85,20	34	987	482
36	97,40	36	987	482
38	100,70	38	1.150	482
41	128,50	41	1.300	550
46	159,40	46	1.500	640
50	179,90	50	1.700	640

PROJAHN



3498



3494



3499



3500

Č. výr.	501408 Sada jemné ozubení (RG 5004)	Díly	Obsah
3498	59,20	4	10 13 17 19 mm
3499	111,90	8	8 10 12 13 16 17 18 19 mm
3494	175,50	14	6 7 8 9 10 11 12 13 14 15 16 17 18 19 mm
3500	375,70	20	6 7 8 9 10 11 12 13 14 15 16 17 18 19 21 22 24 27 30 32 mm